

9/8/2011

Steel LED Exit Sign

Features

- Energy-efficient LED technology
- Heavy duty steel construction
- Steel knockout chevron directional indicators
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- Maintenance-free, rechargeable Ni-Cad battery
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Illumination

- Ultra-bright, energy efficient, long-lasting Red or Green LED

Housing

- Durable, powder-coated 20-gauge steel construction
- Double face standard
- Universal knockout chevrons


Project:	
Catalog#:	
Approved by:	



Mounting

- Universal surface mount, wall or ceiling, with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy.

Dimensions

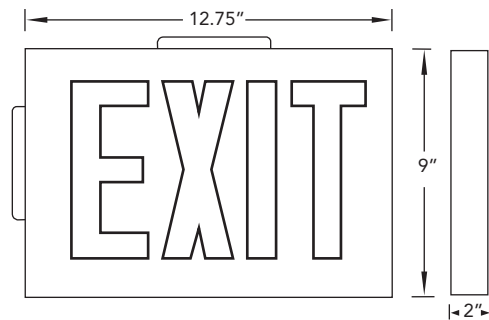

ORDERING INFORMATION

Model Family #	Number of Faces	Operation	Letter Color	Housing/Trim Finish
HL0205	1 - Single Face	Blank - AC Only	R - Red	W - White
	2 - Double Face	B - Battery Backup	G - Green	B - Black
Example model# HL0205 1 B R W				

Specifications subject to change without notice.

