

1/2/2013

BALT5-700-ACTD

(PAC0455-2L)

Fluorescent Emergency Ballast 700 Lumens

- Works in conjunction with an AC ballast to convert new or existing fluorescent fixtures into unobtrusive emergency lighting
- Maintains illumination of one or two lamps in the emergency mode for a minimum of 90 minutes

Project:	
Catalog#:	
Approved by:	




Emergency Ballast

Features

- Time Delay feature for compatibility with End-of-Lamp Life circuitry
- Provides a minimum of 90 minutes of emergency illumination
- Can be installed inside, on top of the fixture
- Can be used in both switched and unswitched fixtures
- UL 924 Listed for damp location
- UL Listed for Retrofit/Field Installation
- Damp location listed
- Life safety NFPA 101
- NEC/OSHA
- Meets most state and local codes

Lamp Compatibility


- Compatible with 1-lamp, 2-lamp, 3-lamp and 4-lamp ballasts with many ballast types including standard, rapid start, instant start, and electronic AC ballast – consult factory regarding specific applications

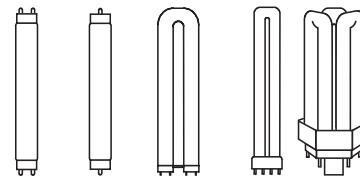

Electrical

- Dual Voltage Input 120V/277 VAC, 60Hz
- Input wattage 3.7 watts
- Solid-state charger circuit
- Test Switch/Power Indicator light
- Temperature Rating (Ambient): 20°C to 50°C [68°F to 122°F]
- Maintenance-free, long life, Sealed Nickel Cadmium Battery
- Maximum battery recharge time: 24 hours

Dimensions

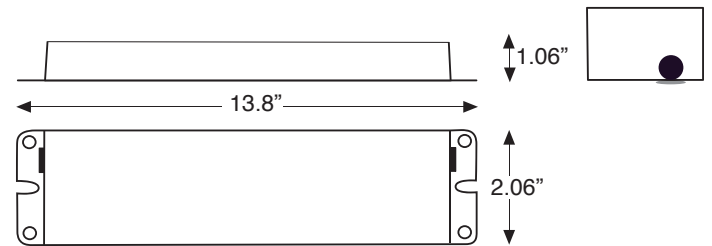

Housing

- Reduced profile design ideal for smaller ballast compartments

Illumination

- Operates one or two lamps in the emergency mode for a minimum of 90 minutes – please refer to page 2 for more information. Provides a maximum initial lumen output of 700 Lumens

Ballast Model No.		No. Of Lamps Operated	BAL700-ACTD	
Lumen Output			700	
Linear Fluorescent Lamps	T5	1 Lamp	14-54	
		2 Lamp	14-39	
	T8	1 Lamp	17-32	
		2 Lamp	17-32	
Compact Fluorescent Lamps	4-Pin Long CFL	2 Lamp	18-50	
		4-Pin CFL	1 Lamp	32
	Special Fluorescent Lamps		U-Bent T8	1 Lamp
		2 Lamp		32

Specifications subject to change without notice.

