

**Mogul-Base LED High Bay
Replacement Lamp**
3000K, 4000K / 115W / 125 -130 Lm/W

Project:	
Catalog#:	
Approved by:	



**No Ballast needed (UL Type B)
Internal driver/line voltage lamp
Remove ballast from fixture**

Applications

LEDMBR lamps are designed as an energy saving **LED** replacement for retrofitting HID high bay and garage luminaires.

Features

- Retrofit to existing 400W HID High Bay fixtures in warehouse or garage applications
- 125 - 130 Lm/W
- Power Factor: >0.9
- CCT: 3000K or 4000K; CRI: >80
- Long Life: 10 years
- Operating temperature range: -40°C (-40°F) to +60°C (140°F)
- Flame retardant material
- Suitable for totally enclosed fixtures
- Built in 6kV surge protection
- UL/cUL Listed, UL Classified
- 120-277 VAC, 50/60Hz
- Non-dimming
- Warranty: 5 Years
- No Fan



High Bay



Ordering Information

Catalog #	Lumens	CCT	Watts	Lm/W	Cover	Base	Replacement
LEDMBR-30115-MV	14,375	3000K	115W	125	Clear	EX39	400W HPS or MH
LEDMBR-40115-MV	14,950	4000K		130			



115W LED High bay

REPLACE




400W HID(HPS/MHL/mercury lamps)

Application


This lamp used for warehouse, barn garage etc.



Suitable for use in high bay fixtures

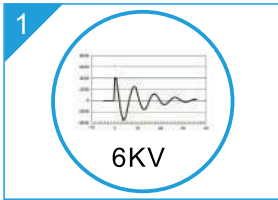

Surge protection: 6KV

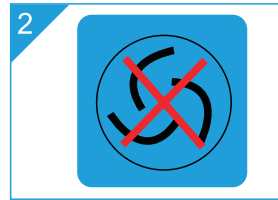

No Fan for heat dissipation solution




JAE Japan JAE connector
Easy driver replacement

- Top quality driver components:
- ★FIRST MOS(USA)
 - ★MPS IC CHIP(USA)
 - ★RUBYCON CAPACITOR(JAPAN)
 - ★FIRST DIODES(USA)



Driver with heat sink silicone for waterproof, dust proof and anti-mosquitoes

Dimensions (in)

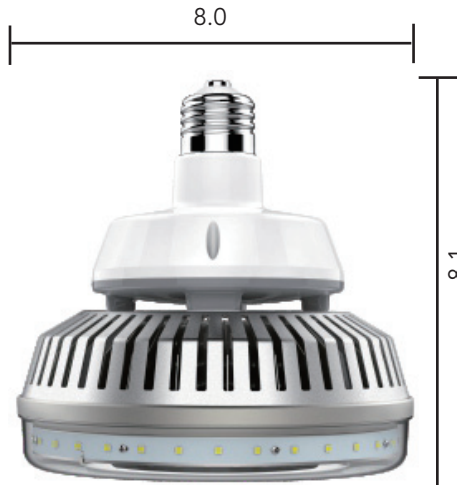

LEDMBR vs. Common Lamp Sizes

Lamp	Base	L (in.)	D (in.)
LEDMBR-XX115-MV	EX39	8.1	8.0
LU250	E39	9.65	2.25
LU400		8.31	3.5
MH250/U		11.5	4.6
MH400/U		8.25	3.5
H37KB-250			

Accessories (sold separately)



Mogul Socket
LH-MOE-01



Surge Protector
20kV, 10kA
HL-LSP10GI277P

