

LED Shop Light

LSL Series


This LED linkable shop light is the ideal one-way solution to fulfill your requirements for efficient lighting in large interior spaces. Designed to provide the best possible lighting while minimizing the trouble and fuss of complicated traditional installation, the LED linkable shop light is ready to get to work the minute you get it out of the package; simply find a power socket, plug it in and it will be ready to light up whenever you need.

Features

- Linkable design: using the plug-in connector, connect up to 8 LSL42340MV units or up to 5 LSL44040MV units.
- Ideal for use in workshops, utility rooms, and garages.
- 2400/4000 lm options.
- Multi-volt operation: 120–277VAC
- Ambient temperature rating: -20°C/-4°F to 40°C/104°F
- Plug-n-play direct operation: no wiring and routing needed.
- Suitable for suspended or surface mount. Accessories included in package.
- Nice choice of general indoor lighting and damp location applicable.
- Instant-on. No flicker, humming or pausing.
- Up to 45 years (3hrs/day) operating lifespan. Long-lasting, outstanding performance.
- ETL-listed for excellent quality and safe operation.
- Eco-friendly: no mercury, UV, infrared or other deleterious radiation.



LSL42340MV – 4 Foot, 1 Lamp
47.25 (l) x 2.8 (w) x 1.78 (h) inches

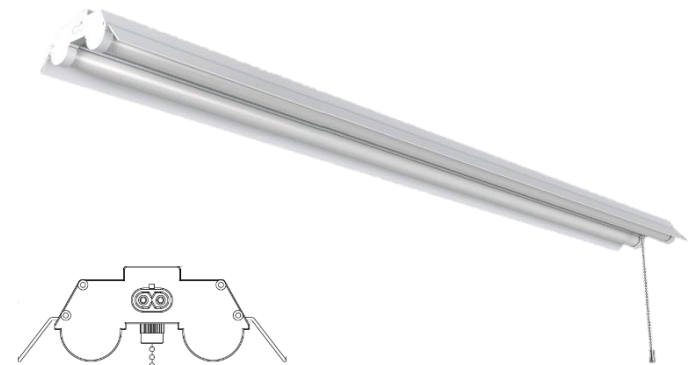

LSL44040MV – 4 Foot, 2 Lamp
47.25 (l) x 5.2 (w) x 1.85 (h) inches

NOTE: On-Off Pull Chain only available in LSL44040MV model

Ordering Information




Model	Configuration	Performance	Voltage	CCT	CRI	Dimmable	Beam	Lifespan
LSL42340MV	4 Foot, 1 Lamp	2,400 Lumens 23W	120—277V 50/60HZ	4000K	>80	No	120°	50,000H
LSL44040MV	4 Foot, 2 Lamp	4,000 Lumens 40W						





Installation Instructions

Accessories included: (1) Power Cord, (1) End Connector, (2) Hook Screws, (2) Expansion anchors, (2) Screws, and (2) Hanging Chains.

LSL42340MV installation

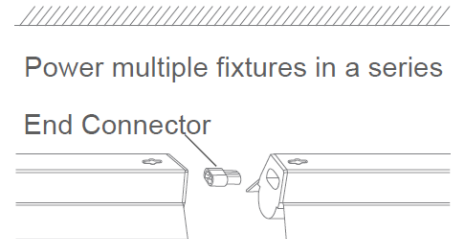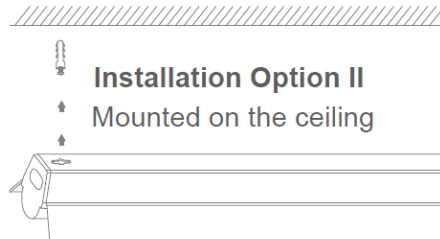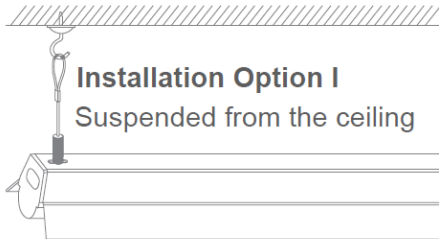

LSL44040MV installation

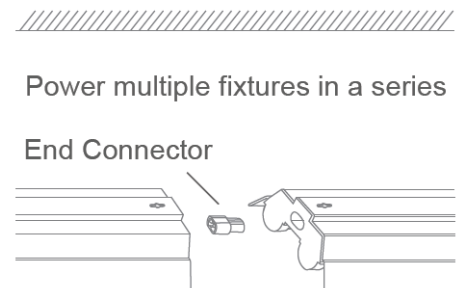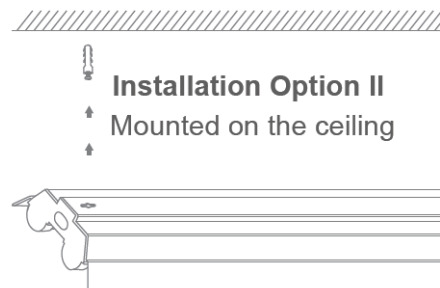

Photometric Data

